




Do you use a headset for both your telephone and your computer? Now you can jump from one to the other with the flick of a switch—the SeleCT switch from GN Netcom, Inc. The SeleCT makes it easy to move from phone calls to multimedia to speech recognition to computer-telephony applications. Without fumbling with cords and connectors, or replacing your current GN Netcom equipment.

- **Switch instantly from telephone to computer, for speech recognition and computer-telephony (e.g., voice over Internet) applications**
- **Use with your existing GN Netcom headset**
- **Enjoy hands-free benefits—and GN Netcom sound quality—on all your voice applications**




SELECT


THE ONE-CLICK COMPUTER-TELEPHONY SWITCH.

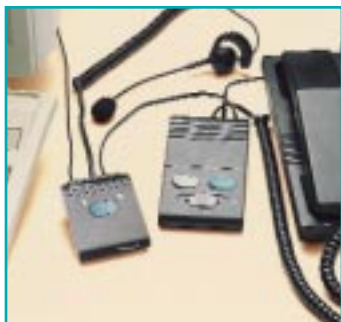


The SeleCT system easily connects your headset to both your telephone and computer, so you can move from one to the other with the flick of a switch. A 6-foot cord with standard 3.5 mm phono jacks is included.

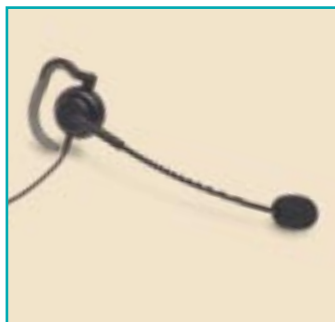


The Profile SureFit Flex, which gives you a choice of three interchangeable wearing styles (flexible earhook, earloop and headband), is just one of the GN Netcom headsets you can use with the SeleCT switch.

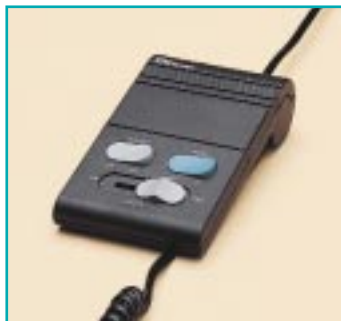

The MPA-II Multi-Purpose Amplifier works on most phone systems with a modular handset connector. The easiest amplifier to set up and use, the MPA-II features a sliding volume control, headset/handset switch, mute switch and a built-in headset stand. An optional on-line indicator lights when the headset is in use.

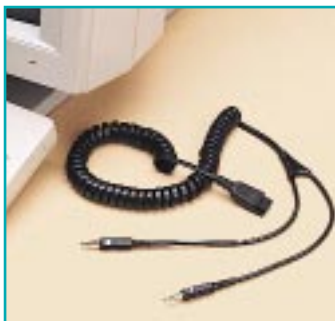

The PC/Headset Adapter is the non-switchable way to get the hands-free benefit of a headset plus the advantages of CTI.

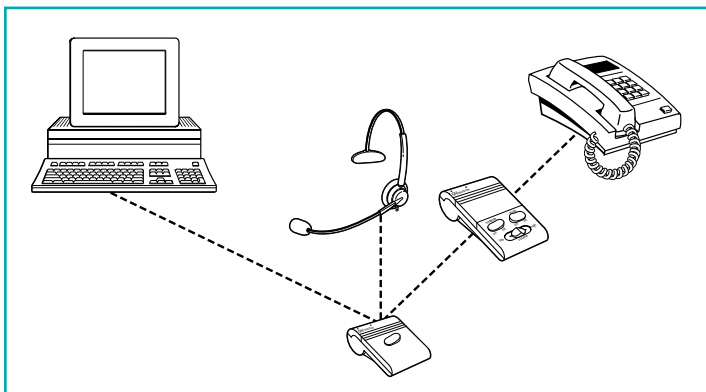

It's easy to get the benefits of the SeleCT. Simply connect your headset to the SeleCT switch, and the SeleCT to your computer and telephone.

Standard Features	SeleCT
Large, user-friendly rocker switch	Δ
6-foot cord w/two 3.5 mm jacks	Δ
12-inch modular phone cord	Δ
Two-Year Warranty	Δ
Velcro mounting kit	Δ

Compatibility		
Amplifier	Carbon	Electret
GN Netcom MPA-II	Δ	Δ
UNEX MP-10A		Δ
MPA Satellite		Δ
ACS Applica		Δ

Fits most sound cards (including Sound Blaster®-compatible) and voice modems using standard 3.5 mm jacks.

General Specifications	
Operating Temperature:	0°-50°
Dielectric Withstand Voltage:	5,000 V AC or 7,000 V DC
Safety:	UL and CE compliant

Ordering Guide	Order No.
SeleCT switch	27313101
Profile SureFit Flex Headset	405-FLEX-SF
MPA-II Amplifier	MPA-II
PC/Headset Adapter	1004831

GN Netcom, Inc.

For more information: