



B-Box Interactive

LP 500



The UPS solution for the PC

- Smart and nice design
- Interactive Technology, Pseudo Sinewave output
- RS232 Simple Contacts interfaces
- LAN/DSL Overvoltage Protection
- MultiServer software for Windows, Linux, Unix, etc.
- 24-months warranty

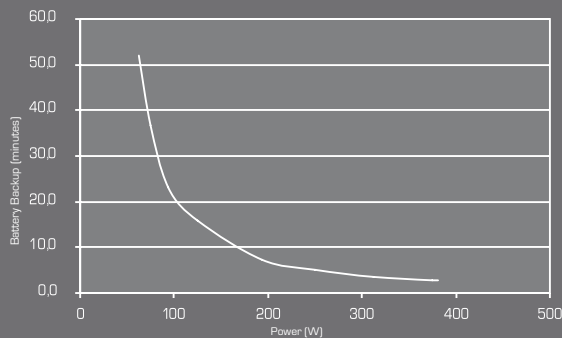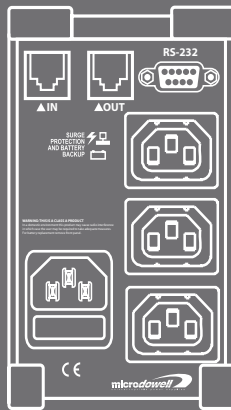

Note:

* The table above shows the Battery Runtime, according to the load (in Watts). The battery runtime is indicative, and is meant with new and fully charged batteries.

TECHNICAL SPECIFICATIONS

Model	LP 500
Power	500VA (300W)
Dimensions (HxWxD)	135 x 80 x 240 mm
Shipping Dimensions (HxWxD)	175 x 127 x 330 mm
Net Weight	4,8 Kg
Shipping Weight	5,3 Kg
Operating Temperature	0 ÷ 35 °C
Storage Temperature	-20 ÷ 50 °C
Operative Relative Humidity	0 ÷ 95% (Non Condensing)
Noise (online) @ 1 mt.	36 dBA
Color	Black
Input	
Voltage	185 ÷ 275 Vac (Single Phase)
Frequency	50 / 60 Hz
Input Connections	(x1) IEC 320
Output	
Voltage (mains mode)	230 Vac
Voltage (battery mode)	230 Vac ±7%
Frequency	50 Hz / 60 Hz
Output Format	Simulated Sine Wave
Output Connections	(x2) IEC 320 + (x1) IEC 320 (Filter Only)
Intervention Time (Typical)	≤ 6 ms
Efficiency	> 97%
Batteries and Backup Time	
Battery Type (Q.ty)	Maintenance-free Sealed Lead-Acid (x1) 12V - 4,5Ah
Typical Recharge Time	8h
Backup Time (60% load)*	8 min.
Controls and Communication	
Front Panel	2 Led (Power On & Battery), 1 Button and Buzzer
Audible Alarms	On Battery, Low Battery
Interface Ports	RS232 Simple Contacts
Software	UPSEye XP (free download)
Internet Line Protection	Yes
Easy Swap Batteries	No
Conformance	
Regulatory Approvals	CE (EN62040-1-1; EN60950-1; EN50091-2)
Warranty	2 Years (Battery + Electronics)
Equipment protection policy	Lifetime